



DOSATRON®

An Ingersoll Rand Business

40 GPM: D40WL3000NAF

PRODUCT DESCRIPTION

The Dosatron D40WL3000NAF-40 GPM injector is water-powered, along with being NSF/ANSI/CAN 61&372 Certified. There is no need for electricity with applications such as water potabilization, water disinfection, or water sanitation.

PRODUCT SPECIFICATIONS

Dilution Range:	1:3000 to 1:800 (0.03% to 0.125%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	2.2 to 116 PSI
Available Housing Materials:	Polypropylene (Standard Blue)
Dimensions:	25 1/4" x 8 1/2"
Weight:	12 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, weighted strainer, mounting bracket and operating manual



Certified to
NSF/ANSI/CAN 61&372

MAINTENANCE KITS

Injection Seal Kit (Part #: 8PJ075NAF) - For yearly maintenance

Call 800-523-8499 to order the Dosatron for your specific application




DOSATRON®

An Ingersoll Rand Business

40 GPM: D40WL3000NAF

Bypass Installation

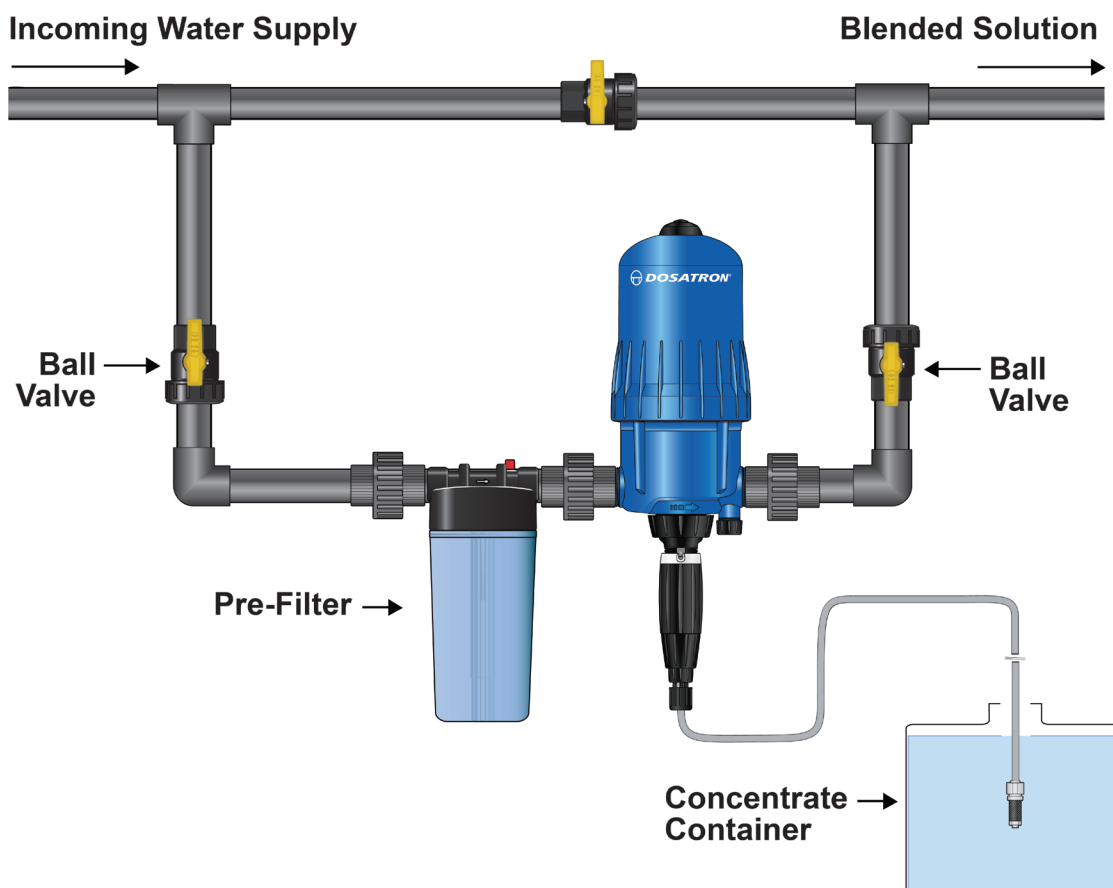

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatron.com

Dosatron International, LLC. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.