

11 GPM: D25RE2

PRODUCT DESCRIPTION

The water-powered Dosatron **D25RE2 - 11 GPM** allows for a variety of animal health applications, such as water line cleaning. The ratio range is 1:500 to 1:50 and is easy to install. It can be plumbed right into your system or for industrial applications, use an Industrial Plumbing Kit (IPK34-10GPM).

PRODUCT SPECIFICATIONS

Dilution Range:	1:500 to 1:50 (0.2% to 2%)
Water Flow Range:	0.05 to 11 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	Polyacetal (Standard Blue)
Other Options:	Side-inject, viscous
Dimensions:	14" x 6 1/4"
Weight:	4 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor



MAINTENANCE KITS

Mini-Maintenance Kit (Part #: PJ117MINI-H) - For regular maintenance

Injection Seal Kit (Part #: PJ093) - For yearly maintenance

Rebuild Kit (Part #: MKD25RE2) - Extends the life of your unit

Call 800-523-8499 to order the Dosatron for your specific application




An Ingersoll Rand Business

11 GPM: D25RE2

Recommended Installation for Industrial Applications

IPK34 - 10 GPM Industrial Plumbing Kit

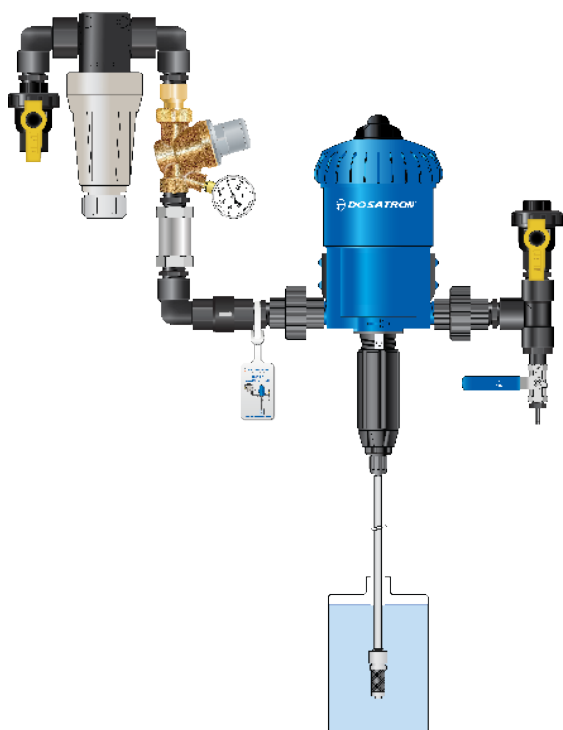

3/4" polypropylene single union ball valve
1/2" stainless steel ball valve
3/4" poly 200 mesh tee filter
3/4" brass pressure regulator w/gauge
3/4" 10 GPM flow restrictor
3/4" polypropylene check valve
3/4" union schedule 80 PVC
3/4" x 2" polypropylene fittings
1/2" x 2" polypropylene fittings
1/2" x 1/2" barb fitting
3/4" male to 1/2" female reducer bushing
3/4" Tee
3/4" street elbows
Roll of Teflon tape
Instruction card
Zip tie

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatron.com

Dosatron International, LLC. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.